

## Hampton Harbor Overview

Hampton Harbor is located in Seabrook and Hampton, New Hampshire. The Harbor consists of a Federal Navigation Project (FNP) and a State Maintained Anchorage.

The Hampton Harbor FNP Consists of:

- 8-foot deep Mean Lower Low Water (MLLW) Entrance Channel
- 8-foot deep MLLW Seabrook Channel
- 8-foot deep MLLW Hampton Channel
- 8-foot deep MLLW Cross Channel
- 8-foot deep MLLW Seabrook Anchorage
- 8-foot deep MLLW Hampton Anchorage
- 6-foot deep MLLW Hampton Anchorage

The State of New Hampshire maintains a 6-foot deep MLLW Anchorage within Hampton Harbor.

Hampton Harbor was last dredged Oct 2012 - Feb 2013 when approximately 115,000 CY of sandy material was removed from the FNP and 52,000 CY was removed from the State Maintained Anchorage with placement at Seabrook Beach and Hampton State Beach Park.



Aerial Photo looking North from Seabrook

## Surveying and Sampling/ Testing Results

- Last Sampling Event Completed: Fall of 2018
- Consists of sandy material.
- Placement Sites identified for this maintenance dredging event include:
  - 1) the Middle Ground Sand Flat (behind and within the existing composite sheet pile wall built in 2005),
  - 2) the Route 1A Southern Bridge Abutment,
  - 3) Seabrook Beach
  - 4) Hampton State Beach Park



## Navigation Maintenance Dredging Information


# Hampton Harbor, Seabrook and Hampton, NH Project Specific Information

### Map of Interest Area



## 2019/2020 Maintenance Dredging

- Contractor: H&L Contracting, LLC
- Dredge : 16" Hydraulic Pipeline Dredge (SCROD II)
- Construction Contract: \$ 4.45 million
- Estimated Dredge Amount : 150,000 CY
- Work Hours: 24/7
- Environmental Windows :
  - Beach Work  
October 1, 2019 to March 15, 2020
  - Inner Harbor Dredging  
October 15, 2019 to February 1, 2020
  - Entrance Channel Dredging  
October 15, 2019 to March 15, 2020

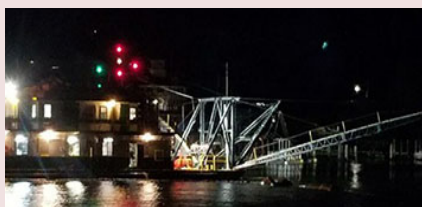

Photos from <http://hlcontractingllc.com>

